

8.28

8.30 As shown in Video V8.10 and Fig P8.30 the velocity profile for laminar flow in a pipe is quite different from that for turbulent flow. With laminar flow the velocity profile is parabolic; with turbulent flow at $Re = 10,000$ the velocity profile can be approximated by the power-law profile shown in the figure. (a) For laminar flow, determine at what radial location you would place a Pitot tube if it is to measure the average velocity in the pipe. (b) Repeat part (a) for turbulent flow with $Re = 10,000$.

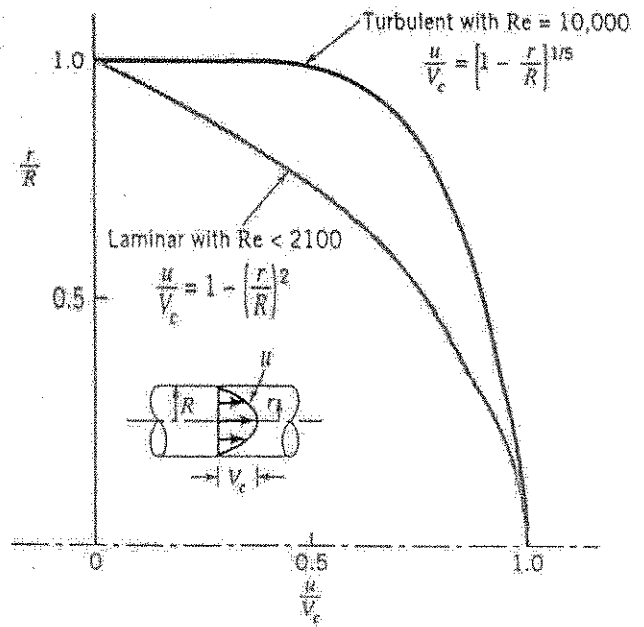


FIGURE P8.30

For laminar or turbulent flow,

$$Q = AV = \pi R^2 V = \int u dA = \int u (2\pi r dr) = 2\pi \int_0^R u r dr$$

a) Laminar flow:

$$\pi R^2 V = 2\pi V_c \int_0^R r [1 - (\frac{r}{R})^2] dr = 2\pi V_c [\frac{R^2}{2} - \frac{R^2}{4}] = \pi \frac{R^2}{2} V_c$$

Thus, $V = \frac{1}{2} V_c$ For $u = V = \frac{V_c}{2}$ the equation for $\frac{u}{V_c}$ gives

$$\frac{u}{V_c} = \frac{1}{2} = 1 - (\frac{r}{R})^2, \text{ or } (\frac{r}{R})^2 = \frac{1}{2} \text{ Thus, } r = \frac{1}{\sqrt{2}} R = \underline{\underline{0.707R}}$$

b) Turbulent flow

$$\pi R^2 V = 2\pi V_c \int_0^R r [1 - \frac{r}{R}]^{1/5} dr = 2\pi R^2 V_c \int_0^1 (\frac{r}{R}) [1 - (\frac{r}{R})]^{1/5} d(\frac{r}{R})$$

Let $y = 1 - (\frac{r}{R})$ so that $(\frac{r}{R}) = 1 - y$ and $d(\frac{r}{R}) = -dy$

$$\begin{aligned} \text{Thus, } \pi R^2 V &= 2\pi R^2 V_c \int_{y=1}^{y=0} (1-y) y^{1/5} (-dy) = 2\pi R^2 V_c \int_0^1 (y^{1/5} - y^{6/5}) dy \\ &= 2\pi R^2 V_c [\frac{5}{6} - \frac{5}{11}] = 2\pi R^2 V_c (\frac{25}{66}) \end{aligned}$$

or $V = \frac{50}{66} V_c$ For $u = V = \frac{50}{66} V_c$ the equation for $\frac{u}{V_c}$ gives

$$\frac{u}{V_c} = \frac{50}{66} = [1 - \frac{r}{R}]^{1/5} \text{ or } \frac{r}{R} = 0.750 \text{ so that } r = \underline{\underline{0.750R}}$$