

P5.46 If a vertical wall at temperature T_w is surrounded by a fluid at temperature T_o , a natural convection boundary layer flow will form. For laminar flow, the momentum equation is

$$\rho(u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y}) = \rho\beta(T - T_o)g + \mu \frac{\partial^2 u}{\partial y^2}$$

to be solved, along with continuity and energy, for (u, v, T) with appropriate boundary conditions. The quantity β is the thermal expansion coefficient of the fluid. Use ρ, g, L , and $(T_w - T_o)$ to nondimensionalize this equation. Note that there is no "stream" velocity in this type of flow.

using $\rho, g, L, \alpha (T_w - T_o)$

$$\Rightarrow U = \sqrt{gL} \quad \text{like } Fr = U/\sqrt{gL}$$

$$u^+ = \frac{u}{\sqrt{gL}} \quad v^+ = \frac{v}{\sqrt{gL}} \quad x^+ = \frac{x}{L} \quad y^+ = \frac{y}{L}$$

$$T^+ = (T - T_o) / (T_w - T_o)$$

$$u = u^+ \sqrt{gL} \quad v = v^+ \sqrt{gL} \quad x = x^+ L \quad y = y^+ L$$

$$T = T^+ (T_w - T_o) + T_o$$

$$\frac{\partial}{\partial x} = \frac{\partial}{\partial x^+} \frac{\partial x^+}{\partial x} = \frac{1}{L} \frac{\partial}{\partial x^+}$$


$$\frac{\partial}{\partial y} = \frac{\partial}{\partial y^+} \frac{\partial y^+}{\partial y} = \frac{1}{L} \frac{\partial}{\partial y^+} \quad \frac{\partial^2}{\partial y^2} = \frac{1}{L^2} \frac{\partial^2}{\partial y^{+2}}$$

Substitute into momentum equation:

① Convection

$$\rho \left[\frac{u^+ \sqrt{gL}}{L} \frac{\partial}{\partial x^+} (u^+ \sqrt{gL}) + \frac{v^+ \sqrt{gL}}{L} \frac{\partial}{\partial y^+} (u^+ \sqrt{gL}) \right] =$$

$$\frac{\rho g L}{L} u^+ \frac{\partial u^+}{\partial x^+} + \frac{\rho g L}{L} v^+ \frac{\partial u^+}{\partial y^+} = \rho g \left[u^+ \frac{\partial u^+}{\partial x^+} + v^+ \frac{\partial u^+}{\partial y^+} \right]$$

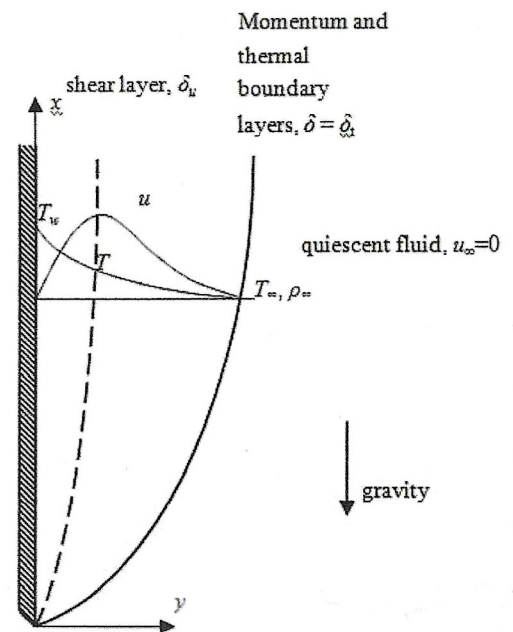

(2) Buoyancy

$$\rho \beta [T^* (T_w - T_0)] g$$

(3) viscous

$$\frac{\mu}{L^2} \frac{\partial^2 u^*}{\partial y^{*2}} = \frac{\mu \sqrt{g \beta L}}{L^2} \frac{\partial^2 u^*}{\partial y^{*2}}$$

Combine :

$$\rho g \left[u^* \frac{\partial u^*}{\partial x^*} + v^* \frac{\partial u^*}{\partial y^*} \right] = \rho g \beta [T^* (T_w - T_0)] + \frac{\mu \sqrt{g \beta L}}{L^2} \frac{\partial^2 u^*}{\partial y^{*2}}$$

$$u^* \frac{\partial u^*}{\partial x^*} + v^* \frac{\partial u^*}{\partial y^*} = \underbrace{[\beta (T_w - T_0)] T^*}_{(1)} + \underbrace{\frac{\mu}{\rho \sqrt{g \beta L}} \frac{\partial^2 u^*}{\partial y^{*2}}}_{(2)}$$

Two nondimensional parameters (1) & (2) w/o name

4-13.3 Free Convection along a Vertical Isothermal Plate

For a vertical plate with $g_x = g$, let us assume constant T_w . If we ignore the anomalous case of water near freezing, where β may be negative, all common fluids have low density at a hot wall. Buoyant motion and free convection are both upward along a hot vertical plate, and the leading edge $x = 0$ starts at the bottom. For a cold plate, buoyancy is downward and $x = 0$ is located at the top of the plate. The coordinate y is normal to the plate.

Since the local Grashof number Gr_x plays the role of Re_x^2 in buoyant motion, we can guess (correctly) that the boundary-layer thickness δ/x will be proportional to $Gr_x^{-1/4}$. Indeed, the "scale analysis" in the text by Bejan (1994) predicts that δ will be proportional to $x^{1/4}$. For vertical plate flow, velocity and thickness scales are prescribed by Schmidt et al. (1930) in an assortment of similarity variables:

$$\eta = \left(\frac{Gr_x}{4} \right)^{1/4} \frac{y}{x} \quad Gr_x = \frac{\beta g (T_w - T_\infty) x^3}{\nu^2} \quad u = 2 \sqrt{x \beta g (T_w - T_\infty)} f' \quad v = \left[\frac{\beta g (T_w - T_\infty) \nu^2}{4x} \right]^{1/4} (\eta f' - 3f) \quad \Theta = \frac{T - T_\infty}{T_w - T_\infty} \quad (4-259)$$

The reader can verify that u and v satisfy continuity and that these variables will reduce momentum and energy relations to the two coupled nonlinear ordinary differential equations

$$f''' + 3ff'' - 2f'^2 + \Theta = 0 \quad \text{and} \quad \Theta'' + 3Prf\Theta' = 0 \quad (4-260)$$

subject to the boundary conditions

$$f(0) = f'(0) = f'(\infty) = 0 \quad \text{and} \quad \Theta(0) = 1 \quad \Theta(\infty) = 0 \quad (4-261)$$

Note that Eqs. (4-260) are coupled and must be solved simultaneously, which is always the case in free-convection problems. Since no analytic solution is known, numerical integration is necessary. There are two unknown initial values at the wall. One must find the proper values of $f''(0)$ and $\Theta'(0)$, which cause the velocity and temperature to vanish for large η .

Two dimensionless parameters:

$$\beta (T_w - T_o), \quad \left(\frac{\mu}{\rho L \sqrt{g \beta}} \right) Re^{-1} \sqrt{g \beta}$$

can be combined as

$$Grashof \# = g \beta (T_w - T_o) L^3 / \nu^2$$

as only non dimensioned coefft but we use $\frac{\nu}{L}$ as velocity scale

$$\nu = \frac{\mu}{\rho} = \frac{\frac{M}{LT}}{\frac{M}{L^3}} = \frac{M}{LT} \times \frac{L^3}{M}$$

$$u^* u^*_{x^*} + v^* u^*_{y^*} = Gr T^* + u^*_{yy^*} = \frac{L^2}{T}$$

P5.46 If a vertical wall at temperature T_w is surrounded by a fluid at temperature T_o , a natural convection boundary layer flow will form. For laminar flow, the momentum equation is

$$\rho(u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y}) = \rho \beta (T - T_o) g + \mu \frac{\partial^2 u}{\partial y^2}$$

to be solved, along with continuity and energy, for (u, v, T) with appropriate boundary conditions. The quantity β is the thermal expansion coefficient of the fluid. Use ρ, g, L , and $(T_w - T_o)$ to nondimensionalize this equation. Note that there is no "stream" velocity in this type of flow.

Solution: For the given constants used to define dimensionless variables, there is only one pairing which will give a velocity unit: $(gL)^{1/2}$. Here are the writer's dimensionless variables:

$$u^* = \frac{u}{\sqrt{gL}}; \quad v^* = \frac{v}{\sqrt{gL}}; \quad x^* = \frac{x}{L}; \quad y^* = \frac{y}{L}; \quad T^* = \frac{T - T_o}{T_w - T_o}$$

Substitute into the momentum equation above and clean up so all terms are dimensionless:

$$\rho(u^* \frac{\partial u^*}{\partial x^*} \frac{gL}{L}) + \rho(v^* \frac{\partial u^*}{\partial y^*} \frac{gL}{L}) = \rho \beta g (T_w - T_o) T^* + \mu \frac{\partial^2 u^*}{\partial y^{*2}} \frac{\sqrt{gL}}{L^2}$$

$$\text{or:} \quad u^* \frac{\partial u^*}{\partial x^*} + v^* \frac{\partial u^*}{\partial y^*} = [\beta (T_w - T_o)] T^* + \left[\frac{\mu}{\rho L \sqrt{gL}} \right] \frac{\partial^2 u^*}{\partial y^{*2}} \quad \text{Ans.}$$

There are two dimensionless parameters: $\beta (T_w - T_o)$ and $\mu / [\rho L \sqrt{gL}]$. Neither has a name, to the writer's knowledge, because a much cleverer analysis would result in only a single dimensionless parameter, the *Grashof number*, $g \beta (T_w - T_o) L^3 / \nu^2$. (See, for example, White, *Viscous Fluid Flow*, 3rd edition, Section 4-14.3, page 323.)