


Cylindrical Coordinates (Figure B.2)



Position: $\mathbf{x} = (R, \varphi, z) = R\mathbf{e}_R + z\mathbf{e}_z$; $x = R \cos \varphi$, $y = R \sin \varphi$, $z = z$; or $R = \sqrt{x^2 + y^2}$, $\varphi = \tan^{-1}(y/x)$

Unit vectors: $\mathbf{e}_R = \mathbf{e}_x \cos \varphi + \mathbf{e}_y \sin \varphi$, $\mathbf{e}_\varphi = -\mathbf{e}_x \sin \varphi + \mathbf{e}_y \cos \varphi$, \mathbf{e}_z = same as Cartesian

Unit vector dependencies: $\partial \mathbf{e}_R / \partial R = 0$, $\partial \mathbf{e}_R / \partial \varphi = \mathbf{e}_\varphi$, $\partial \mathbf{e}_R / \partial z = 0$

$$\partial \mathbf{e}_\varphi / \partial R = 0, \partial \mathbf{e}_\varphi / \partial \varphi = -\mathbf{e}_R, \partial \mathbf{e}_\varphi / \partial z = 0$$

$$\partial \mathbf{e}_z / \partial R = 0, \partial \mathbf{e}_z / \partial \varphi = 0, \partial \mathbf{e}_z / \partial z = 0$$

Gradient Operator: $\nabla = \mathbf{e}_R \frac{\partial}{\partial R} + \mathbf{e}_\varphi \frac{1}{R} \frac{\partial}{\partial \varphi} + \mathbf{e}_z \frac{\partial}{\partial z}$

Surface integral, S , of $f(R, \theta, z)$ over the cylinder defined by

$$R = \xi: S = \int_{\varphi=0}^{2\pi} \int_{z=-\infty}^{+\infty} f(\xi, \varphi, z) \xi \, dz \, d\varphi$$

Surface integral, S , of $f(R, \theta, z)$ over the half plane defined by

$$\varphi = \psi: S = \int_{R=0}^{+\infty} \int_{z=-\infty}^{+\infty} f(R, \psi, z) \, dz \, dR$$

$$\text{Surface integral, } S, \text{ of } f(R, \theta, z) \text{ over the plane defined by } z = \zeta: S = \int_{R=0}^{+\infty} \int_{\varphi=0}^{2\pi} f(R, \varphi, \zeta) R \, d\varphi \, dR$$

$$\text{Volume integral, } V, \text{ of } f(R, \theta, z) \text{ over all space: } V = \int_{z=-\infty}^{+\infty} \int_{R=0}^{+\infty} \int_{\varphi=0}^{2\pi} f(R, \varphi, z) R \, d\varphi \, dR \, dz$$

Cylindrical Coordinates (Figure B.2)

Position and velocity vectors: $\mathbf{x} = (R, \varphi, z) = R\mathbf{e}_R + z\mathbf{e}_z$; $\mathbf{u} = (u_R, u_\varphi, u_z) = u_R\mathbf{e}_R + u_\varphi\mathbf{e}_\varphi + u_z\mathbf{e}_z$

$$\text{Gradient of a scalar } \psi: \nabla\psi = \mathbf{e}_R \frac{\partial\psi}{\partial R} + \mathbf{e}_\varphi \frac{1}{R} \frac{\partial\psi}{\partial\varphi} + \mathbf{e}_z \frac{\partial\psi}{\partial z}$$

$$\text{Laplacian of a scalar } \psi: \nabla^2\psi = \frac{1}{R} \frac{\partial}{\partial R} \left(R \frac{\partial\psi}{\partial R} \right) + \frac{1}{R^2} \frac{\partial^2\psi}{\partial\varphi^2} + \frac{\partial^2\psi}{\partial z^2}$$

$$\text{Divergence of a vector: } \nabla \cdot \mathbf{u} = \frac{1}{R} \frac{\partial}{\partial R} (Ru_R) + \frac{1}{R} \frac{\partial u_\varphi}{\partial\varphi} + \frac{\partial u_z}{\partial z}$$

$$\text{Curl of a vector, vorticity: } \boldsymbol{\omega} = \nabla \times \mathbf{u} = \mathbf{e}_R \left(\frac{1}{R} \frac{\partial u_z}{\partial\varphi} - \frac{\partial u_\varphi}{\partial z} \right) + \mathbf{e}_\varphi \left(\frac{\partial u_R}{\partial z} - \frac{\partial u_z}{\partial R} \right) + \mathbf{e}_z \left(\frac{1}{R} \frac{\partial (Ru_\varphi)}{\partial R} - \frac{1}{R} \frac{\partial u_R}{\partial\varphi} \right)$$

$$\text{Laplacian of a vector: } \nabla^2\mathbf{u} = \mathbf{e}_R \left(\nabla^2 u_R - \frac{u_R}{R^2} - \frac{2}{R^2} \frac{\partial u_\varphi}{\partial\varphi} \right) + \mathbf{e}_\varphi \left(\nabla^2 u_\varphi + \frac{2}{R^2} \frac{\partial u_R}{\partial\varphi} - \frac{u_\varphi}{R^2} \right) + \mathbf{e}_z \nabla^2 u_z$$

Strain rate S_{ij} and viscous stress τ_{ij} for an incompressible fluid where $\tau_{ij} = 2\mu S_{ij}$:

$$S_{RR} = \frac{\partial u_R}{\partial R} = \frac{1}{2\mu} \tau_{RR}, \quad S_{\varphi\varphi} = \frac{1}{R} \frac{\partial u_\varphi}{\partial\varphi} + \frac{u_R}{R} = \frac{1}{2\mu} \tau_{\varphi\varphi}, \quad S_{zz} = \frac{\partial u_z}{\partial z} = \frac{1}{2\mu} \tau_{zz}$$

$$S_{R\varphi} = \frac{R}{2} \frac{\partial}{\partial R} \left(\frac{u_\varphi}{R} \right) + \frac{1}{2R} \frac{\partial u_R}{\partial\varphi} = \frac{1}{2\mu} \tau_{R\varphi}, \quad S_{\varphi z} = \frac{1}{2R} \frac{\partial u_z}{\partial\varphi} + \frac{1}{2} \frac{\partial u_\varphi}{\partial z} = \frac{1}{2\mu} \tau_{\varphi z},$$

$$S_{zR} = \frac{1}{2} \left(\frac{\partial u_R}{\partial z} + \frac{\partial u_z}{\partial R} \right) = \frac{1}{2\mu} \tau_{zR}$$

$$\text{Equation of continuity: } \frac{\partial \rho}{\partial t} + \frac{1}{R} \frac{\partial}{\partial R} (R\rho u_R) + \frac{1}{R} \frac{\partial}{\partial\varphi} (\rho u_\varphi) + \frac{\partial}{\partial z} (\rho u_z) = 0$$

Navier-Stokes equations with constant ρ , constant ν , and no body force:

$$\frac{\partial u_R}{\partial t} + (\mathbf{u} \cdot \nabla) u_R - \frac{u_\varphi^2}{R} = -\frac{1}{\rho} \frac{\partial p}{\partial R} + \nu \left(\nabla^2 u_R - \frac{u_R}{R^2} - \frac{2}{R^2} \frac{\partial u_\varphi}{\partial\varphi} \right),$$

$$\frac{\partial u_\varphi}{\partial t} + (\mathbf{u} \cdot \nabla) u_\varphi + \frac{u_R u_\varphi}{R} = -\frac{1}{\rho R} \frac{\partial p}{\partial\varphi} + \nu \left(\nabla^2 u_\varphi + \frac{2}{R^2} \frac{\partial u_R}{\partial\varphi} - \frac{u_\varphi}{R^2} \right),$$

$$\frac{\partial u_z}{\partial t} + (\mathbf{u} \cdot \nabla) u_z = -\frac{1}{\rho} \frac{\partial p}{\partial z} + \nu \nabla^2 u_z$$

$$\text{where: } \mathbf{u} \cdot \nabla = u_R \frac{\partial}{\partial R} + \frac{u_\varphi}{R} \frac{\partial}{\partial\varphi} + u_z \frac{\partial}{\partial z} \quad \text{and} \quad \nabla^2 = \frac{1}{R} \frac{\partial}{\partial R} \left(R \frac{\partial}{\partial R} \right) + \frac{1}{R^2} \frac{\partial^2}{\partial\varphi^2} + \frac{\partial^2}{\partial z^2}.$$

Steady Flow Between Concentric Rotating Cylinders

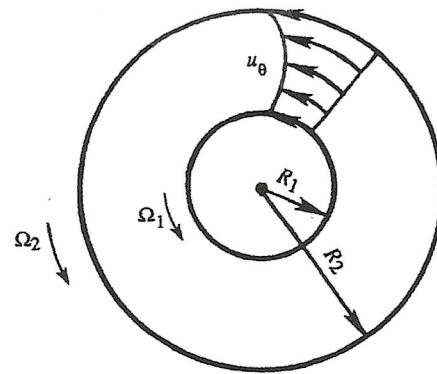


FIGURE 9.6 Circular Couette flow. Viscous fluid flows in the gap between an inner cylinder with radius R_1 that rotates at angular speed Ω_1 and an outer cylinder with radius R_2 that rotates at angular speed Ω_2 .

$$\underline{u} = (0, u_\theta(r), 0) \quad R^{-1} \frac{\partial}{\partial r} (R u_r) + R^{-1} \frac{\partial}{\partial \theta} (u_\theta) + \frac{2}{R^2} (u_z) = 0$$

(continuity automatically satisfied)

$$R\text{-momentum: } -\frac{u_r^2}{R} = -\frac{1}{R} \frac{du_r}{dr} \quad -p(r) = f(u_\theta(r))$$

$$\Omega\text{-momentum: } \Omega = R \frac{du_r}{dr} [R^{-1} \frac{du_\theta}{dr} (R u_\theta)]$$

$$\text{double integration} \Rightarrow u_\theta(r) = A R + B/R$$

$$u_\theta(R_1) = \omega_1 R_1, \quad u_\theta(R_2) = \omega_2 R_2$$

$$A = (\omega_2 R_2^2 - \omega_1 R_1^2) / (R_2^2 - R_1^2)$$

$$B = (\omega_2 - \omega_1) R_1^2 R_2^2 / (R_2^2 - R_1^2)$$

$$u_\theta(r) = \frac{1}{(R_2^2 - R_1^2)} \left[(\omega_2 R_2^2 - \omega_1 R_1^2) R - (\omega_2 - \omega_1) \frac{R^2 - R_1^2}{R_2^2} \right]$$

Interesting limiting cases:

$$(1) \quad R_2 \rightarrow \infty \quad \omega_2 = 0$$

$$(2) \quad R_1 \rightarrow 0 \quad \omega_1 = 0$$

①

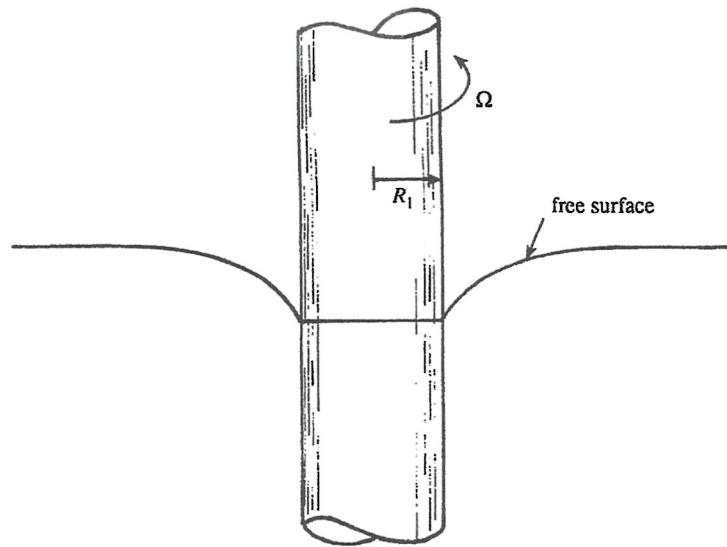


FIGURE 9.7 Rotation of a solid cylinder of radius R in an infinite body of viscous fluid. If gravity points downward along the cylinder's axis, the shape of a free surface pierced by the cylinder is also indicated. The flow field is viscous but irrotational.

$$u_\theta(r) = \Omega R_1^2 / R \quad \text{Same as ideal vortex}$$

$\text{for } R > R_1, \Gamma = 2\pi R_1 R_1^2$

Only example viscous solution Ω is completely irrotational. Ω exists but no net viscous force on fluid element.

$$\tau_{\theta\theta} = \mu \left[R^{-1} \frac{\partial u_\theta}{\partial r} + R \frac{2}{5\mu} \left(\frac{u_\theta}{R} \right) \right] = -2\mu R_1 R_1^2 / R^2$$

$\tau = A \times \text{stress} \times V$

Mechanical power per unit length = $(2\pi R_1) \tau_{\theta\theta} u_\theta$, which equals the integrated dissipation.

② $u_\theta(r) = \Omega_2 R$ solid body rotation

Exercise 9.15. Consider a solid cylinder of radius a , steadily rotating at angular speed Ω in an infinite viscous fluid. The steady solution is irrotational: $u_\theta = \Omega a^2 / R$. Show that the work done by the external agent in maintaining the flow (namely, the value of $2\pi R u_\theta \tau_{r\theta}$ at $R = a$) equals the viscous dissipation rate of fluid kinetic energy in the flow field.

Solution 9.15. Using the given velocity field, the shear stress is:

$$\tau_{R\varphi} = \mu R \frac{\partial}{\partial R} \left(\frac{u_\varphi}{R} \right) = \mu \Omega a^2 R \frac{\partial}{\partial R} \left(\frac{1}{R^2} \right) = -2\mu \Omega a^2 \frac{1}{R^2}.$$

The work done per unit height = $\{2\pi a \tau_{R\varphi} u_\varphi\}_{R=a} = 2\pi a \cdot 2\mu \Omega \cdot \Omega a = 4\pi \mu a^2 \Omega^2$.

From (4.58) the viscous dissipation rate of kinetic energy per unit volume for an incompressible flow is $\rho \varepsilon = 2\mu S_{ij} S_{ij}$, where ε is the viscous dissipation of kinetic energy per unit mass. For the given flow field there is only one non-zero independent strain component:

$$S_{R\varphi} = S_{\varphi R} = \frac{R}{2} \frac{\partial}{\partial R} \left(\frac{u_\varphi}{R} \right) = \frac{\Omega a^2}{2} R \frac{\partial}{\partial R} \left(\frac{1}{R^2} \right) = -\Omega a^2 \frac{1}{R^2}.$$

Therefore:

$$\rho \varepsilon = 2\mu S_{ij} S_{ij} = 2\mu (S_{R\varphi}^2 + S_{\varphi R}^2) = 4\mu \Omega^2 \frac{a^4}{R^4},$$


so the kinetic energy dissipation rate per unit height is:

$$\int_a^\infty \rho \varepsilon 2\pi R dR = 8\pi \mu \Omega^2 a^4 \int_a^\infty \frac{1}{R^3} dR = 4\pi \mu \Omega^2 a^2,$$

which equals the work done turning the cylinder.

Work done = \bar{W}
= Power
in our context

$$dA = R dR d\theta$$

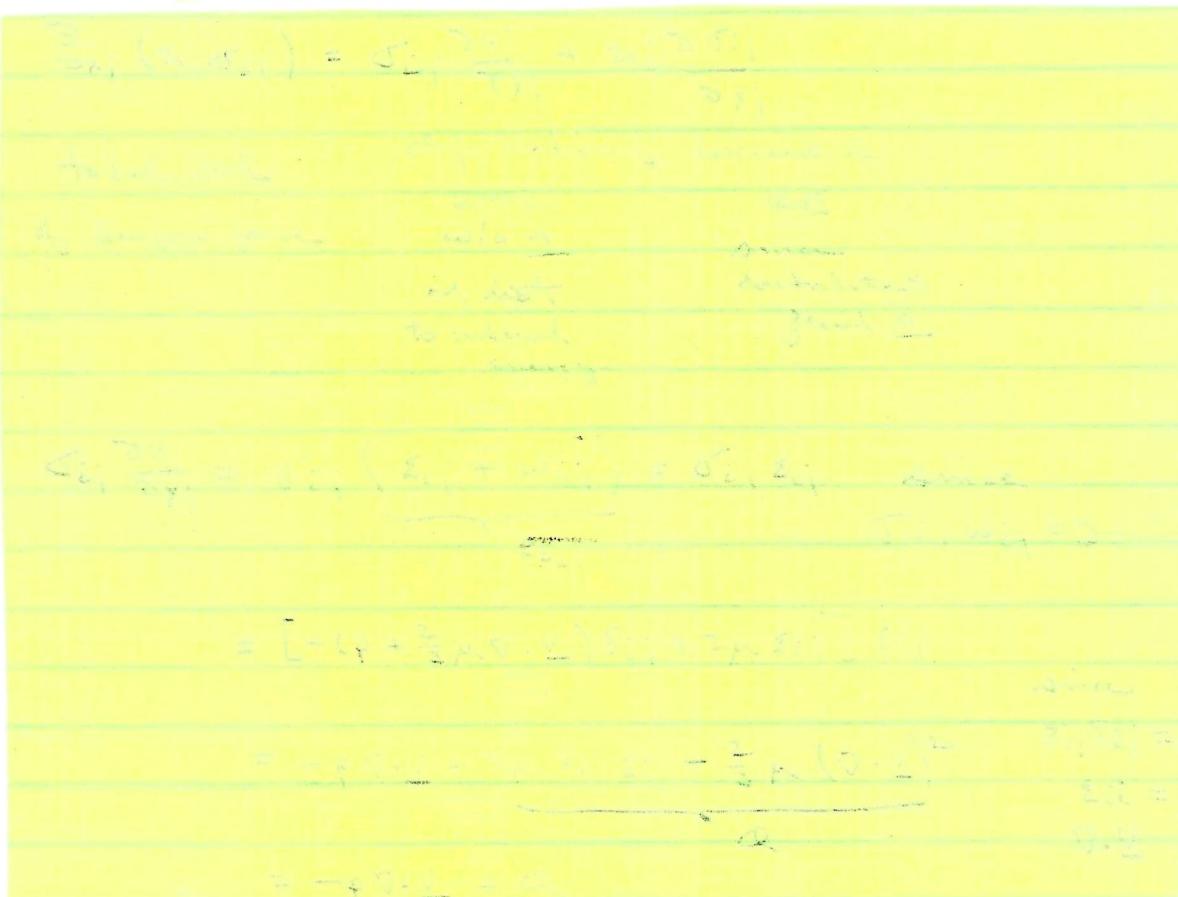

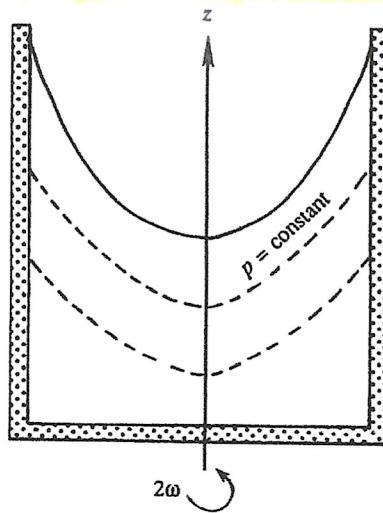


FIGURE 5.2 The steady flow field of a viscous liquid in a steadily rotating tank is solid body rotation. When the axis of rotation is parallel to the (downward) gravitational acceleration, surfaces of constant pressure in the liquid are paraboloids of revolution.

$$\frac{\partial}{\partial x_j} (U_i \sigma_{ij}) = \sigma_{ij} \frac{\partial U_i}{\partial x_j} + U_i \frac{\partial \sigma_{ij}}{\partial x_j}$$

Total work
of surface
force

Deformatio
n work w/o
 \underline{a} and lost
to internal
energy

Increase of
KE since
contributes
fluid \underline{a}

$$\sigma_{ij} \frac{\partial U_i}{\partial x_j} = \sigma_{ij} (\varepsilon_{ij} + \omega_{ij}) = \sigma_{ij} \varepsilon_{ij}$$

$\sigma_{ij} \omega_{ij} = 0$ since it is the product of a symmetric and an anti-symmetric tensor.

$$\sigma_{ij} \frac{\partial U_i}{\partial x_j} = \left[- \left(p + \frac{2}{3} \mu \nabla \cdot \underline{U} \right) \delta_{ij} + 2\mu \varepsilon_{ij} \right] \varepsilon_{ij}$$

$$\sigma_{ij} \frac{\partial U_i}{\partial x_j} = -p \nabla \cdot \underline{U} + \underbrace{2\mu \varepsilon_{ij} \varepsilon_{ij} - \frac{2}{3} \mu (\nabla \cdot \underline{U})^2}_{\varphi}$$

Since $\varepsilon_{ij} \delta_{ij} = \varepsilon_{ii} = \nabla \cdot \underline{U}$

$\boxed{\varphi}$

$$\sigma_{ij} \frac{\partial U_i}{\partial x_j} = -p \nabla \cdot \underline{U} + \varphi$$